





Technical data

- 1.Nominal voltage: 150V/4A
- PITCH:2.5mm
- 2.Insulation Withstands Voltage: AC1300V/MIN
- 3.Insulation Resistace: 1000MΩ or more at DC500V
- 4.Using temperature range:-40C° ~115C°
- 5.Soldering temperature range:250C°±10C°/5sec
- 6.Safety approval: 
- 7.RoHS Compliance
- 8.Critical dimension: 
- 9.Undimensioned Tolerances:

Dim L=(P-1)X2.5+4.4	Dim B	Dim L
Dim B=(P-1)X2.5	±0.15	±0.20
P = 1/2 number of poles(04--48)	±0.20	±0.25
	±0.25	±0.30
	±0.30	±0.40

HAEH250 xx x xxx

- ① Poles 04-48 (2x2P-2x24P)
- ② Color
- 0 Black 3 Orange 5 Green 6 Blue G Pale grey....
- ③ Custom
- 000 K MARK 00K KUNACON MARK.....

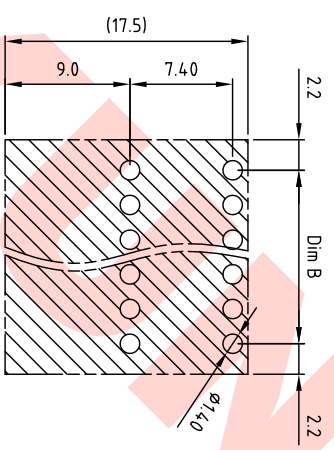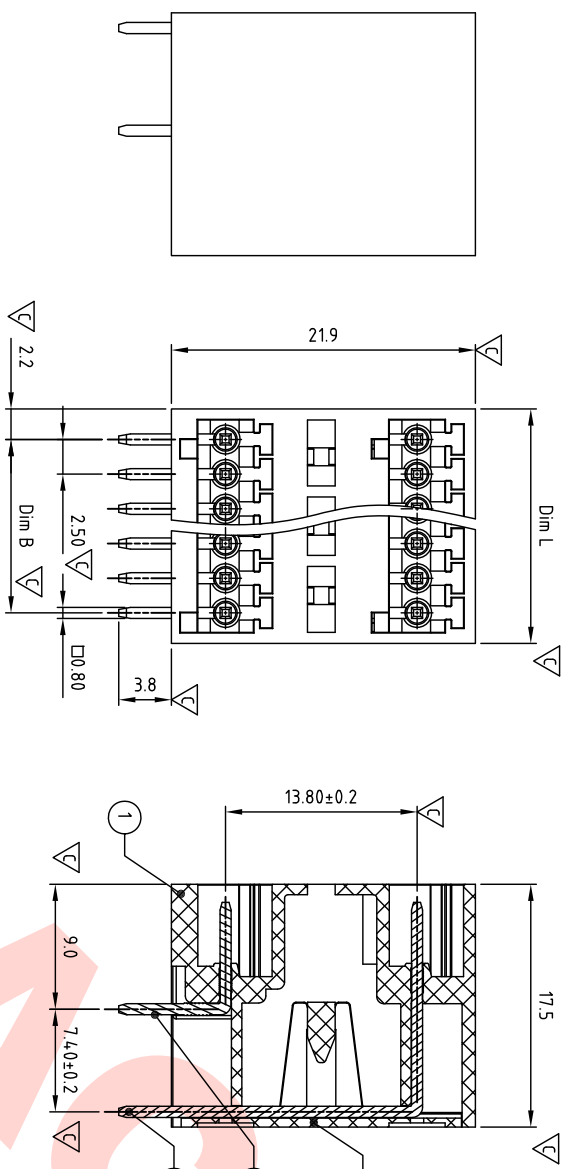

P.C.B. LAYOUT

4	PIN	Copper	TIN PLATED	P1/2
3	LONG PIN	Copper	TIN PLATED	P1/2
2	COVER	PA66 UL 94V-0	ALL COLOR	1
1	BODY	PA66 UL 94V-0	ALL COLOR	1

DWG	WF. Zhang	DATE	2016.03.10	UNITS:	MM	SHEET:	1 OF 1	Tolerance	0.1TY
CHK.	WF. Zhang	DATE	2016.03.10	SCALE:	NONE 4:1 (:)	REV.:	A		
APP.	Marvin Zhang	DATE	2016.03.31	TITLE:	HA-EH250 Series Close Type Right angle(90D)			X	±0.50
				PART NO.	HAEH250xxxxxx			X.X	±0.30
				DWG NO.	HA-E250-B001			X.XX	±0.10
								X°	±1°

△	SIGN	DESCRIPTION	CHK.	DATE



KUNA Contact Technology Co., Ltd
http://www.kunacon.com