
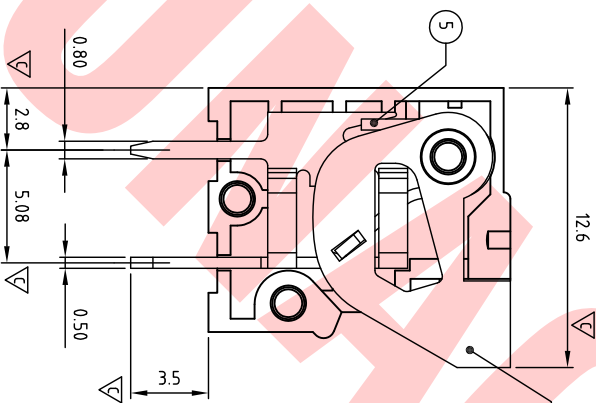
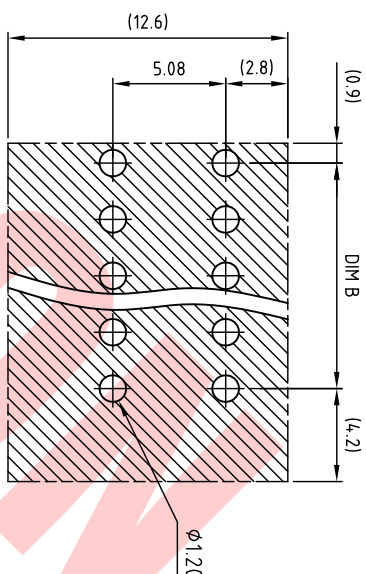
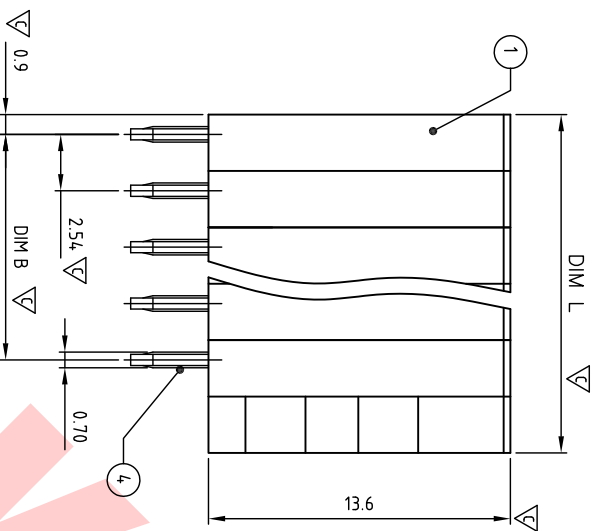


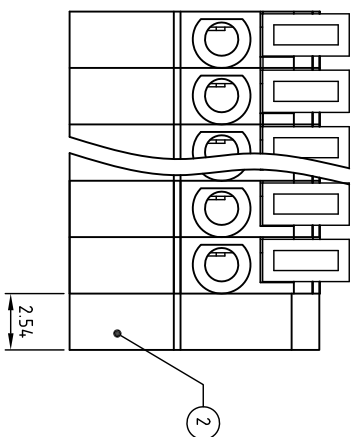

Technical data

- 1.Nominal voltage: 150V/6A
PITCH:2.54mm
- 2.Connection capacity:
AWG 28-20
- 3.Insulation Withstands Voltage:
AC 1300V/MIN
- 4.Insulation Resistance:
1000MΩ or more at DC500V
- 5.Stripping length: 9-10mm
- 6.Using temperature range:-40℃~115℃
Soldering temperature:250±10℃/5s
- 7.Undimensioned Tolerances:

Dim L=(P+1)X2.54 Dim B=(P-1)X2.54 P = number of poles(1-24P)		
0-30mm over 30mm-60mm over 60mm-90mm over 90mm	Dim B ±0.15 ±0.20 ±0.25 ±0.30	Dim L ±0.20 ±0.25 ±0.30 ±0.40

8.Safety approval: 

9.RoHS Compliance

10.Critical dimension: 

SAVO254 xx x xxx

① Poles 01-24

② Color

0 Black 5 Green 6 Blue 8 Gray 9 White.....

③ Custom

000 "K" logo 00K KUNACON logo

ITEM	NAME OF PART	MATERIAL	NOTES	Q'TY
5	WIRE GUARD	Stainless steel		P
4	CONTACT	BRASS	Tin PLATED	P
3	LEVEL	PA UL94V-0	White color	P
2	End COVER	PA UL94V-0	ALL COLOR	1
1	BODY	PA UL94V-0	ALL COLOR	P
DWG. W/F. Zhang DATE 2016.03.20 UNITS: MM SHEET: 1 OF 1 Tolerance				
CHK. W/F. Zhang DATE 2016.03.20 SCALE: NONE 4:1 () REV: A X.X ±0.50				
APP. Marvin. Zhang DATE 2016.03.20 TITLE: Inlet (Vertical) X.XX ±0.30				
PART NO. SAVO254xxxxxx X° ±0.10				
DWG NO. SA-VO254-B001				

Δ	DESCRIPTION	CHK.	DATE
SIGN			



KUNA Contact Technology Co., Ltd
http://www.kunacon.com

