


Technical data

- 1.Nominal voltage: 300V/15A
PITCH:5.08mm
- 2.Connection capacity:
AWG 22-12
- 3. Insulation Withstands Voltage:
AC 1600V/MIN
- 4. Insulation Resistance:
1000M Ω or more at DC500V
- 5. Tightening torque:
4.3 Lb-in (0.5N.m/5.0kgf.cm)
- 6. Screw thread: M2.5
- 7. Stripping length: 8-9mm
- 8. Using temperature range: -40C \circ -115C \circ
- 9. Undimensioned Tolerances:

Dim L = P \times 5.08	Dim B	Dim L
Dim B = (P-1) \times 5.08		
P = number of poles (2-24)		
0-30mm	+0.15	+0.20
over 30mm-60mm	+0.20	+0.25
over 60mm-90mm	+0.25	+0.30
over 90mm	+0.30	+0.40

10. Safety approval: 

11. RoHS Compliance





12. Critical dimension: 

MCSDS508 XX X XXX

- ① Poles 02-24
- ② Color
- ③ Custom

0 Black 3 Orange 5 Green 6 Blue.....

000 K MARK 00K KUNACON MARK.....

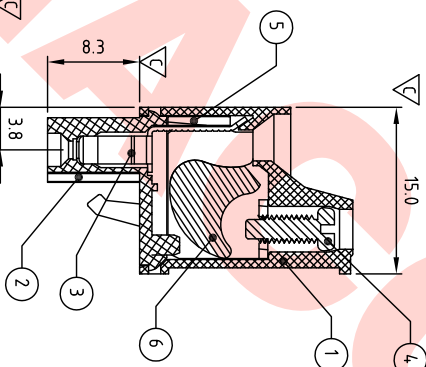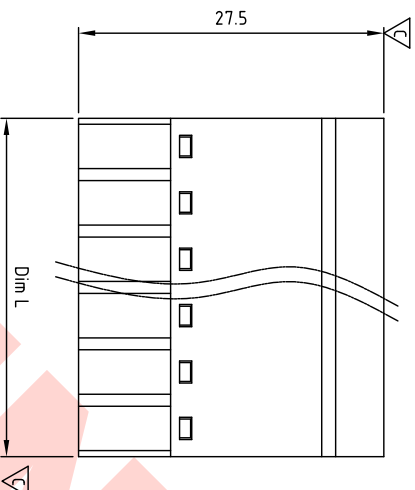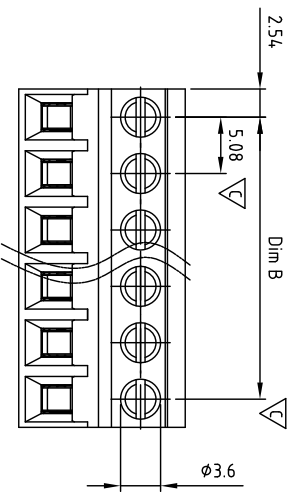

2p Hook

△	DESCRIPTION	CHK.	DATE

6	PRESS BLOCK	STEEL	Zn PLATED	P
5	CAGE	STEEL	M2.5 \times 0.45, Zn Plated	P
4	SCREW	STEEL	M2.5 \times 0.45, Zn Plated	P
3	WIRE GUARD	BRONZE (PbZ)	TIN PLATED	P
2	COVER	PA66 UL94V-0	ALL COLOR	1
1	BODY	PA66 UL94V-0	ALL COLOR	1

DWG.	WF. Zhang	DATE	2016.03.10	UNITS:	MM	SHEET:	1 OF 1	Tolerance
CHK.	WF. Zhang	DATE	2016.03.30	SCALE:	NONE 2.5:1 (.)	REV.:	A	X
APP.	Marvin Zhang	DATE	2016.03.30	TITLE:	MC-SD508 Series "-" slot			
				PART NO.:	MCSDS508XXXXXX			
				DWG NO.:	MC-SS08-B001			

KUNACON Technology Co., Ltd
http://www.kunacon.com