

SECTION A-A


Technical data

- 1 Nominal voltage: 300V/8A  
PITCH: 3.81mm
- 2 Insulation Withstands Voltage:  
AC 1600V/MIN
- 3 Insulation Resistor:  
1000MΩ or more at DC500V
- 4 Using temperature range: -40°C ~ 115°C
- 5 Soldering temperature range: 250°C ± 10°C / 5sec
- 6 Safety approval:
- 7 RoHS Compliance
- 8 Critical dimension:
- 9 Undimmed stoned Tolerances:

Dim L = (1/2P - 1) x 3.81 + 14.2		Dim B	Dim L
Dim B = (1/2P - 1) x 3.81		0-30mm	±0.15
P = number of poles 4-48P		over 30mm-60mm	±0.20
		over 60mm-90mm	±0.25
		over 90mm	±0.30
			±0.40

HA-FV381 xx X xxx

- ① Poles 04-48(2x2p-2x24p)
- ② Color
- ③ Custom
- 0 Black 3 Orange 5 Green 6 Blue.....
- 000 K MARK 00K KUNACON MARK

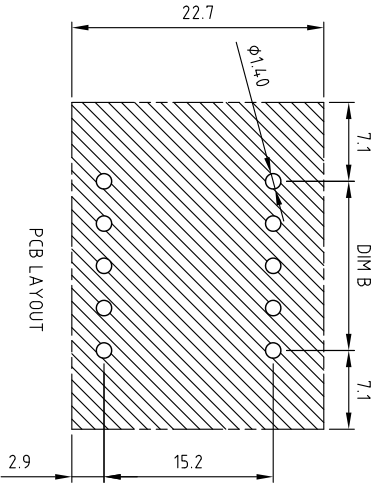

REV	△	DESCRIPTION	NEAL	08/24-23
B	△	新開機	CHK	DATE

ITEM	NAME OF PART	MATERIAL	NOTES	0"TY
4	FLANGE NUT	BRASS	M2.5x0.45	4
3	PIN	COPPER	TIN PLATED	P
2	COVER	PA66 UL94V-0		1
1	BODY	PA66 UL94V-0		1

DWG	NEAL Zhang	DATE	2023.04.13	UNITS:	MM	SHEET:	1 OF 1	Tolerance
CHK	NEAL Zhang	DATE	2023.08.24	SCALE:	NONE 2:1 (.)	REV:	B	±0.50
APP		DATE		TITLE:	HA-FV381 Series W/F type			±0.30
					Vertical (180D)			±0.10
				PART NO.	HA-FV381xxxxxx			±1°
				DWG NO.	HA-F381-B002			



KUNA Contacta Technology Co, Ltd  
http://www.kunacon.com